

# BL Series


## High-precision Electro-magnetic Balances



BL3200HL

### Very quick response

Very fast response makes a great difference. Even repeated weighing work is comfortable and efficient.

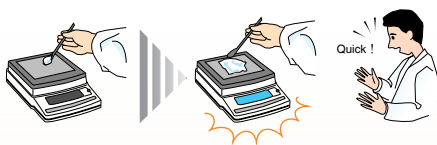

### Compact body

The BL Series provides a high-precision electromagnetic system that is just as compact as a portable scale.

### High stability

The high stability mode of the BL Series produces steady readings even under poor environmental conditions.

### Various unit conversions

Percentage mode, and various unit conversions are standard. Switching between these functions and units is a simple key-touch.

### Analog bar display

Remaining weighing capacity can be seen at a glance. Especially helpful when filling containers on the balance.

### Square pan

Equipped with square pan for ease of operation.

### Interface Capabilities

Optional EP-60A printer can be connected directly to BL Series balances to produce reports. An optional interface is available to enable communication with a PC.

### Piece Counting Function

Quantity can be read as soon as parts are placed on the pan. To set, just load ten pieces and press the key. Pressing the key at 20, 50, or 100 pieces will produce even greater precision, especially for smaller parts. Switching between piece counting and gram display is a single key-touch.



# BL Series

# High-precision Electronic Balance

## Specifications



BL220H  
BL320H



BL320S



BL620S  
BL3200S  
BL2200H  
BL3200H

Model	BL3200HL <b>NEW</b>	BL3200H <b>NEW</b>	BL2200H	BL320H <b>NEW</b>	BL220H	BL3200S	BL620S	BL320S
Capacity	3200g	3200g	2200g	320g	220g	3200g	620g	320g
Minimum display	0.01g	0.01g	0.01g	0.001g	0.001g	0.1g	0.01g	0.01g
Repeatability (standard deviation)	$\sigma \leq 0.01g$	$\sigma \leq 0.01g$	$\sigma \leq 0.01g$	$\sigma \leq 0.001g$	$\sigma \leq 0.001g$	$\sigma \leq 0.06g$	$\sigma \leq 0.01g$	$\sigma \leq 0.006g$
Linearity	$\pm 0.03g$	$\pm 0.03g$	$\pm 0.02g$	$\pm 0.003g$	$\pm 0.002g$	$\pm 0.1g$	$\pm 0.01g$	$\pm 0.01g$
Response time (approx.)	1.0 – 1.2 sec.					0.8 – 1.0 sec.		
Ambient temperature	5 – 40°C / 41 – 104°F							
Temperature coefficient of sensitivity (10 – 35°C)	$\pm 5ppm/^\circ C$ (10 – 30°C)		$\pm 3ppm/^\circ C$	$\pm 5ppm/^\circ C$ (10 – 30°C)	$\pm 3ppm/^\circ C$	$\pm 10ppm/^\circ C$		
Pan size (mm)	160 × 124 (mm)			100 × 100 (mm)		160 × 124 (mm)		100 × 100 (mm)
Dimensions (approx.)	170W × 240D × 75H mm							
Weight (approx.)	2.2 kg							
Power requirements	AC adapter; 90V – 264V, -15% – +10%, 50/60Hz							
Standard accessories	Protective in-use cover			Simple windbreak (brown smoke color), Protective in-use cover		Protective in-use cover		
Display	LCD with back light			LCD				

The contents of this catalog are subject to change without notice.

## Peripherals



URL <http://www.shimadzu.com/balance>

**SHIMADZU CORPORATION.** International Marketing Division  
3. Kanda-Nishikicho 1-chome, Chiyoda-ku, Tokyo 101-8448, Japan  
Phone: 81(3)3219-5641 Fax: 81(3)3219-5710

**SHIMADZU SCIENTIFIC INSTRUMENTS, INC.**  
7102 Riverwood Drive, Columbia, Maryland 21046, U.S.A.  
Phone: 1(410)381-1227 Fax: 1(410)381-1222 Toll Free: 1(800)477-1227

**SHIMADZU DEUTSCHLAND GmbH**  
Albert-Hahn-Strasse 6-10, D-47269 Duisburg, F.R. Germany Phone: 49(203)7687-0 Fax: 49(203)766625

**SHIMADZU (ASIA PACIFIC) PTE LTD.**  
16 Science Park Drive #01-01 Singapore Science Park, Singapore 118227, Republic of Singapore  
Phone: 65-778 6280 Fax: 65-779 2935

**SHIMADZU SCIENTIFIC INSTRUMENTS (OCEANIA) PTY. LTD.**  
Rydalmere Business Park, Unit T, 10-16 South Street, Rydalmere N.S.W. 2116, Australia  
Phone: 61(2)9684-4200 Fax: 61(2)9684-4055

**SHIMADZU DO BRASIL COMERCIO LTDA.**  
Rua Cenzo Sbrighi, 25 CEP 05036-010 Agua Branca, Sao Paulo, BRAZIL  
Phone: (55)11-861-1688 Fax: (55)11-861-2209

**SHIMADZU (HONG KONG) LIMITED**  
Suite 1028 Ocean Center, Harbour City, Tsim Sha Tsui, Kowloon HONG KONG  
Phone: (852)2375-4979 Fax: (852)2199-7438

**Overseas Offices**  
Istanbul, Beijing, Shanghai, Guangzhou, Shenyang, Chengdu, Moscow

### ■ Electronic Printer EP-60A

For printing measurement data and storing calibration records.

- Can be connected to the electronic balance directly (special interface not required); and
- Provides statistical functions.

### ■ AC Adaptor for EP-60A Electronic Printer

For 120/220 VAC

### ■ IFB-102A

RS-232C Interface

